

RWD3000


The Superlative

An cleaning tool of unprecedented quality and robustness. New solutions and material alternatives have led to a quantum jump in the field of hydrodynamic surface demolition technology. Performance could be optimized by a variety of nozzle inserts and combinations. The nozzle weight was reduced to 1.6 kg. Leak free operation results for a 100% power transfer. The variable speed range can be adjusted easily without any tools.

Your advantages

- Highest performance - due to leak free packing
- Most durable - long life times
- More advantageous - with regard to price and service
- Increased flexibility - due to different pressure ranges: 2000/2500/2800/3000 bar
- Faster - due to optimum water jetting result
- More effective - due to technological headway, easy handling and optimum operating efficiency
- Most multi-purpose - for all established brands

Technical data	RWD3000
Operating pressure max.	3000 bar
Recommended flow rate	10 - 30 l/min
Speed adjustable	1000 - 2000 min ⁻¹
Weight	1.6 kg
<small>1 bar = 14.5038 psi, 1l = 0.26417 Gal., 1 kW = 1.3410 HP, 1mm = 0.03937 inch</small>	

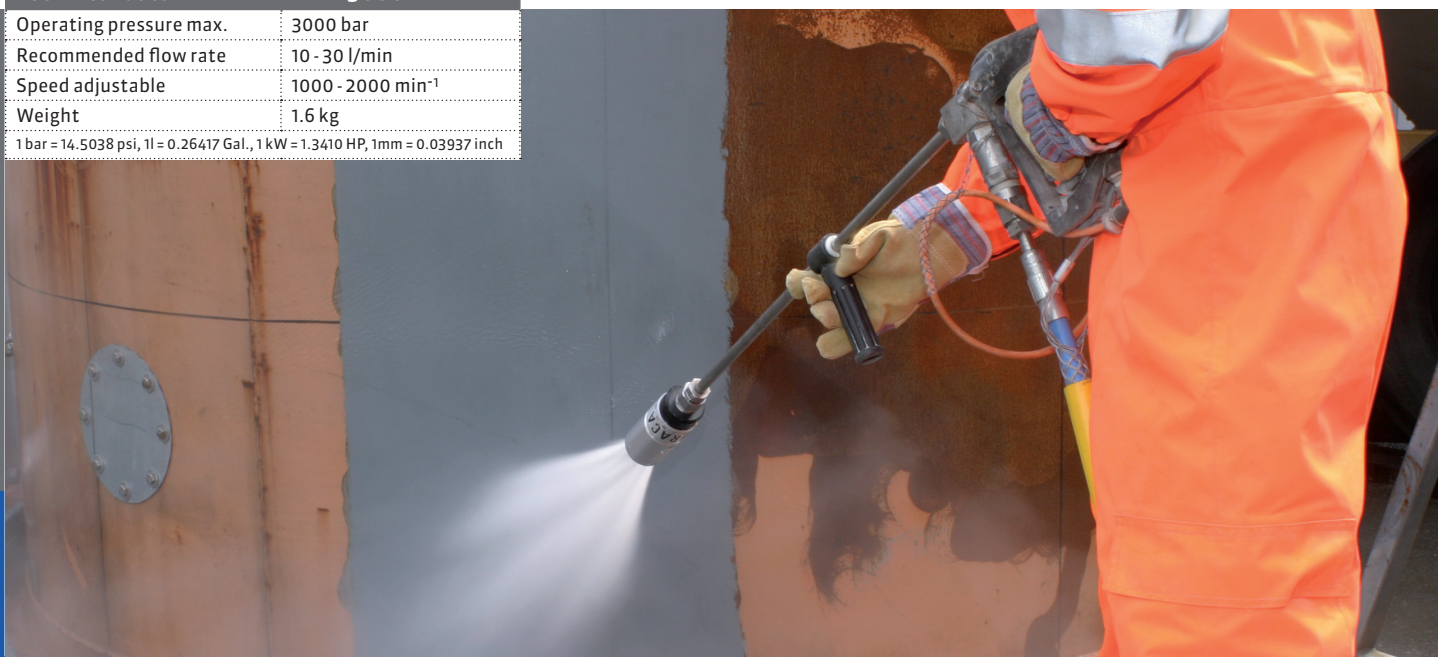

High Pressure Technology

